





# AIR-LEC SPECS




## AIR-LEC AIR SEAL for swinging doors

Especially designed for refrigerator and freezer doors, and the perfect answer for any swing type door where a positive seal is required. The Air-Lec Seal connects in parallel with the swing operator and functions automatically with the operator. The pressurized cylinder releases the spring tension on the door so it can open. Upon closing, the door contacts the fork, and the powerful spring firmly draws the door tight to prevent air circulation and frosting. The exhausting air acts as a cushion to prevent slamming. The air seal does not prevent manual operation of the door. A second Air-Lec Seal can be installed on large doors.

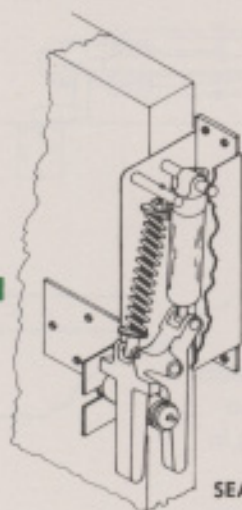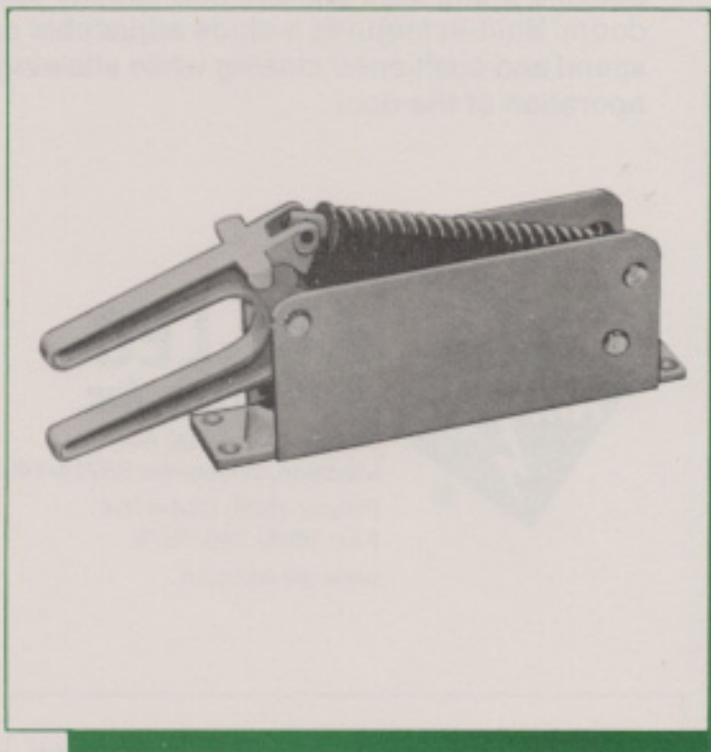

SEAL LATCHED

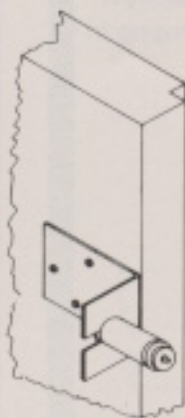

SEAL OPEN



Air requirements for complete cycle — open and close* (in cu. ft.)					H - Height - 7 $\frac{1}{2}$ "
MODEL	DESCRIPTION	80 PSI	100 PSI	120 PSI	W - Width - 2 $\frac{1}{4}$ "
AS	For Standard Doors	.033	.042	.051	P - Projection - 12 $\frac{3}{4}$ "
AS-OL	For Overlap Doors	.033	.042	.051	

\*Multiply by average operations per minute to determine total requirements (C.F.M.)