

# Over-Center Door Operator

**The Over-Center Door Operator is often used on fire doors.**


Engineered for single panel sliding doors up to six feet wide up and weighing up to 1200 pounds, and bi-parting doors for openings up to 12 feet wide. Features include adjustable operating speed.




*Producing professional grade door operators for nearly a century.*

**Old world wisdom meets modern technology.  
Safe. Fast. Dependable.**

*Made in America.*

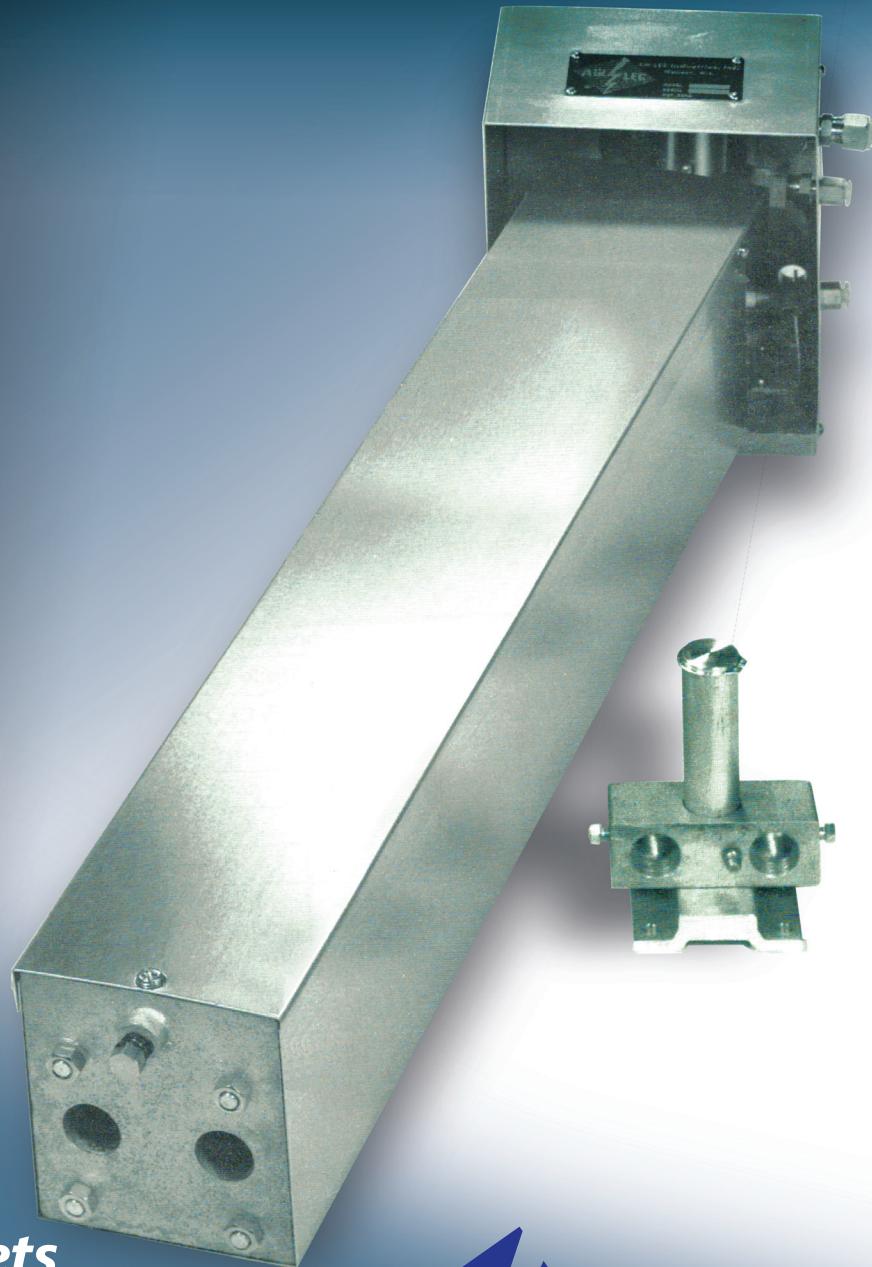

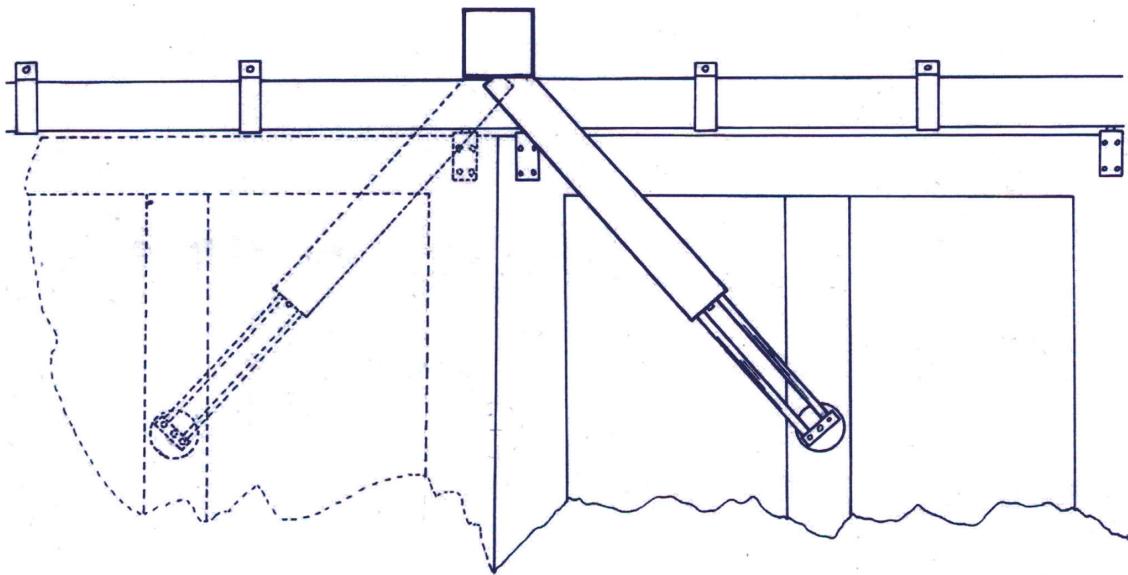

# OVER-CENTER DOOR OPERATOR

MODEL	DOOR SIZE RANGE	DOOR WEIGHT RANGE
0-260	2 1/2' To 6' Travel	Up To 1200 lbs.

## AIR REQUIREMENTS FOR COMPLETE CYCLE - OPEN & CLOSE

80PSI	100PSI	120 PSI
.31 cu. ft. free air	.38 cu. ft. free air	.44 cu. ft. free air

## TYPICAL OPERATOR REQUIREMENTS

Every door requires one door operator per door panel. Every opening requires one control kit and one filter-regulator. Extra control stations are available if desired.

### SINGLE DOOR:

- (1) 0-260 Over-Center Operator
- (1) E-300 or A-30 Pull-Cord Control Kit
- (1) 6148 Filter-Regulator
- (1) 6151/6528 Dehydrator (for moist air)

### BI-PARTING DOORS:

- (2) 0-260 Over-Center Operators
- (1) E-400 or A-40 Pull -Cord Control Kit
- (1) 6148 Filter-Regulator
- (1) 6151/6528 Dehydrator (for moist air)



Copyright ©Air-Lec  
Industries, LLC

**AIR-LEC INDUSTRIES, Inc.**  
**MADISON, WI**  
(608) 244-4754 | [air-lec.com](http://air-lec.com)

DESCRIPTION:  
**OVER CENTER  
DOOR OPERATOR**

FORM 1101A-1-5/17-5B-1

**MADE  
IN THE  
USA**