

# Air-Lec Air Seal for Swinging Doors

**The Air-Lec Door Seal is the perfect answer for freezer and cooler doors or where a positive seal is required.**

The Air-Lec Door Seal connects in parallel with the Air-Lec Swing Operator and functions automatically with the operator.

The pressurized cylinder releases the spring tension on the door to aid in opening. Upon closing, the mechanical door seal contacts the fork, and the powerful spring firmly draws the door tight to prevent air circulation and frosting. The exhausting air acts as a cushion to prevent slamming. The air seal does not prevent manual operation of the door. A second Air-Lec Door Seal can be installed on large doors.





*Producing professional grade  
door operators for nearly a century.*

***Old world wisdom meets  
modern technology.  
Safe. Fast. Dependable.***

*Made in America.*



# AIR-LEC AIR SEAL FOR SWINGING DOORS

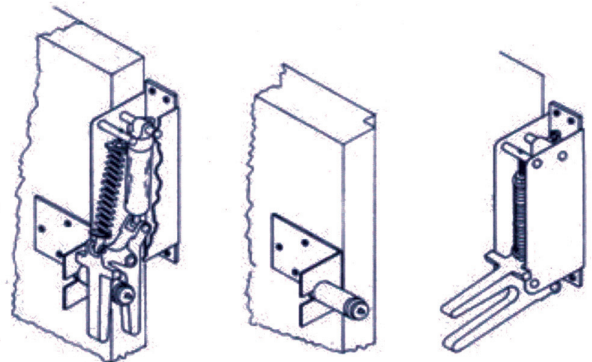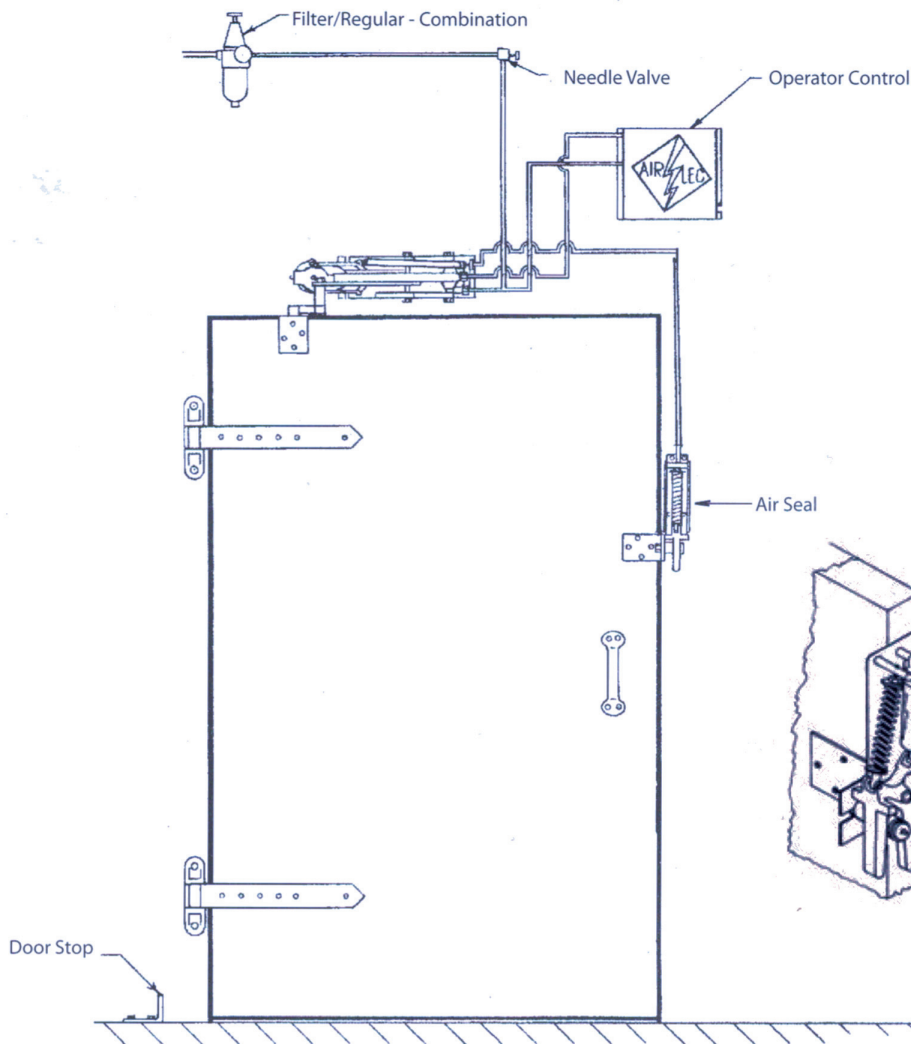

## AIR REQUIREMENTS FOR COMPLETE CYCLE-OPEN AND CLOSE\* (in cu. ft. free air.)

| MODEL | DESCRIPTION        | 80 PSI | 100 PSI | 120 PSI |
|-------|--------------------|--------|---------|---------|
| AS    | For Standard Doors | .033   | .042    | .051    |
| ASOL  | For Overlap Doors  | .033   | .042    | .051    |

H- Height 7 5/8"  
W- Width 2 1/4"  
P - Projection 12 3/4"

\*Multiply by average operations per minute to determine total requirements (c. F. M)



Copyright ©Air-Lec  
Industries, LLC

**AIR-LEC INDUSTRIES, Inc.**  
**MADISON, WI**  
(608) 244-4754 | [air-lec.com](http://air-lec.com)

DESCRIPTION:  
**AIR-LEC AIR SEAL  
FOR SWINGING  
DOORS**

FORM 1401-9-7/ 14-18

**MADE  
IN THE  
USA**